




杭州东沃电子科技有限公司  
HangZhou DongWo Electronic Technology Co., Ltd.  
Specification of Gas discharge Tube  
Part No.2R230TP1 (3.2\*2.7\*4.5)

一、外形尺寸/DIMENSION (Unit:mm, Scale:20:1)

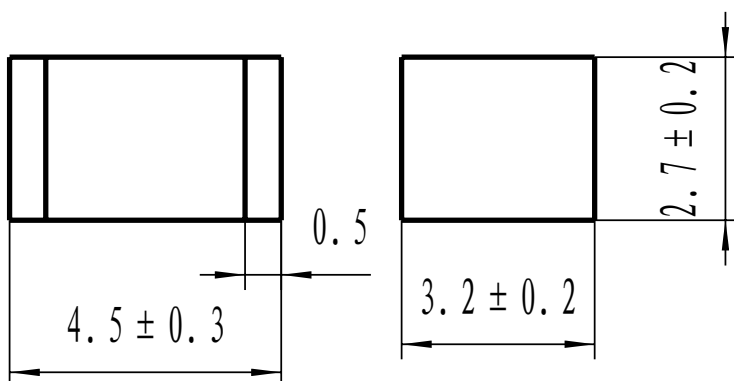

二、电性能参数/ELECTRICAL CHARACTERISTICS  
(terms in accordance with ITU-T K.12)

1、标称直流击穿电压 (Vs)	
Nom. DC spark-over voltage	230V
2、直流击穿电压范围 (100V/s)	
Tolerance of Vs	± 20%
3、冲击击穿电压 (1kV/μs)	
Impulse spark-over voltage	≤ 600V
4、耐脉冲冲击电流 (8/20 μs)	
Impulse discharge current	2kA
5、标称耐工频电流 (50Hz)	
Nom. alternating discharge current	2A
6、绝缘电阻 (DC100V)	
Insulation resistance	≥ 1GΩ
7、极间电容(1MHz)	
Capacitance	≤ 1pF
8、工作贮存温度	
Operation and storage temperature	-40 ~ 90℃
9、气候类型	
Climatic category(IEC 60068-1)	40/90/21
10、无放射性 Without Radioactivity	

三、包装信息(TP1) Tape Package Information

- 1、数量 Quantity: 2500pcs/reel box
- 2、尺寸 Measurement: reel box: Φ330\*12.5mm

四、证书

Certificates

ISO9001:2000



E304047 E226846



SGS