




杭州东沃电子科技有限公司
HangZhou DongWo Electronic Technology Co., Ltd.
Specification of Gas discharge Tube
Part No.2R75TP1 (3.2*2.7*4.5)

一、外形尺寸/DIMENSION (Unit:mm, Scale:10:1)

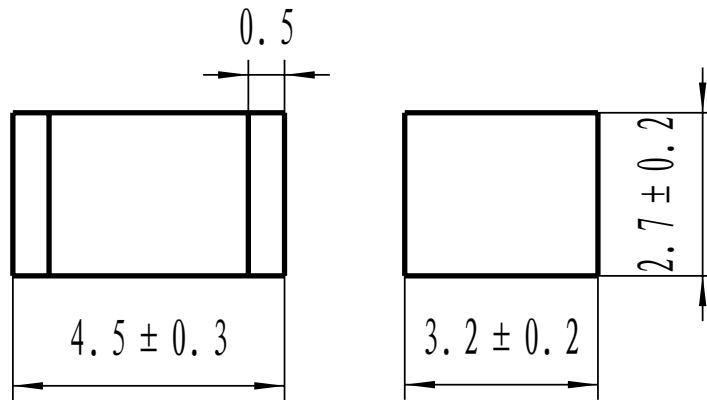

二、电性能参数/ELECTRICAL CHARACTERISTICS
(terms in accordance with ITU-T K.12)

| | |
|------------------------------------|-----------|
| 1、标称直流击穿电压 (Vs) | |
| Nom. DC spark-over voltage | 75V |
| 2、直流击穿电压范围 (100V/s) | |
| Tolerance of Vs | ± 20% |
| 3、冲击击穿电压 (1kV/μs) | |
| Impulse spark-over voltage | ≤ 650V |
| 4、耐脉冲冲击电流 (8/20 μs) | |
| Impulse discharge current | 2kA |
| 5、标称耐工频电流 (50Hz) | |
| Nom. alternating discharge current | 2A |
| 6、绝缘电阻 (DC50V) | |
| Insulation resistance | ≥ 1GΩ |
| 7、极间电容(1MHz) | |
| Capacitance | ≤ 0.5pF |
| 8、工作贮存温度 | |
| Operation and storage temperature | -40 ~ 90℃ |
| 9、气候类型 | |
| Climatic category(IEC 60068-1) | 40/90/21 |
| 10、无放射性 Without Radioactivity | |

三、包装信息(TP1) Tape Package Information

- 1、数量 Quantity: 2500pcs/reel box
- 2、尺寸 Measurement: reel box: Φ330*12.5mm

四、证书

Certificates

ISO9001:2000



E304047 E226846

