



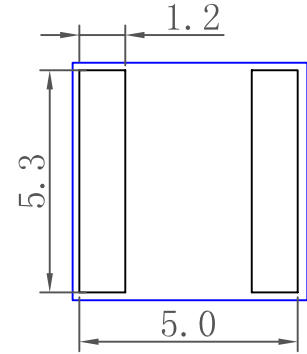

杭州东沃电子科技有限公司
HangZhou DongWo Electronic Technology Co., Ltd.
Specification of Gas discharge Tube

Part No. : 2R90A-TP1 (圆方5×5×4.4)

一、外形尺寸/DIMENSION (Unit:mm, Scale: 5:1)

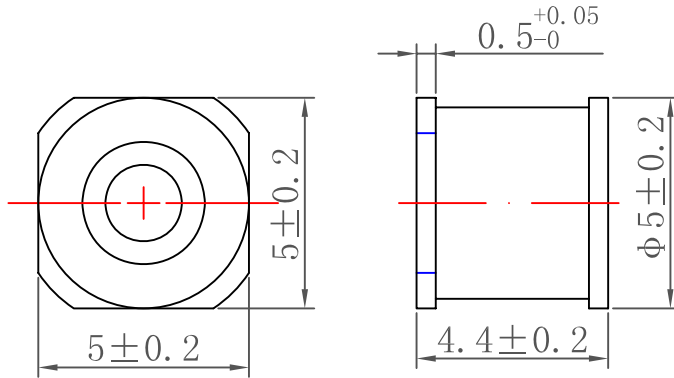

recommended pad outline

二、电性能参数/ELECTRICAL CHARACTERISTICS

(terms in accordance with ITU-T K.12)

1、标称直流击穿电压 (Vs) Nom. DC Spark-over voltage	90v
2、直流击穿电压范围 (100V/s) Tolerance of Vs	±20%
3、冲击击穿电压 (1kV/us) Impulse spark-over voltage	<600v
4、耐脉冲冲击电流 (8/20us) Impulse discharge current	5kA
5、标称耐工频电流 (50Hz) Nom. alternating discharge current	5A
6、绝缘电阻 (DC 50V) Insulation resistance	>1G Ω
7、极间电容 (1MHz) Capacitance	<1pF
8、工作贮存温度 Operation and storage temperature	-40 ~ 90℃
9、气候类型 Climatic category (IEC 60068-1)	40/90/21
10、无放射性 Without Radioactivity	

三、包装信息 (圆方) Package Information

- 1、数量Quantity: 1500 pcs/reel box [1500只/盘]
- 2、尺寸 Measurement: Reel box : Φ 330*30 mm

四、证书 Certificates

ISO9001:2000

