




杭州东沃电子科技有限公司
HangZhou DongWo Electronic Technology Co., Ltd.
Specification of Gas discharge Tube
Part No.2R90TP1 (3.2*2.7*4.5)

一、外形尺寸/DIMENSION (Unit:mm, Scale:20:1)

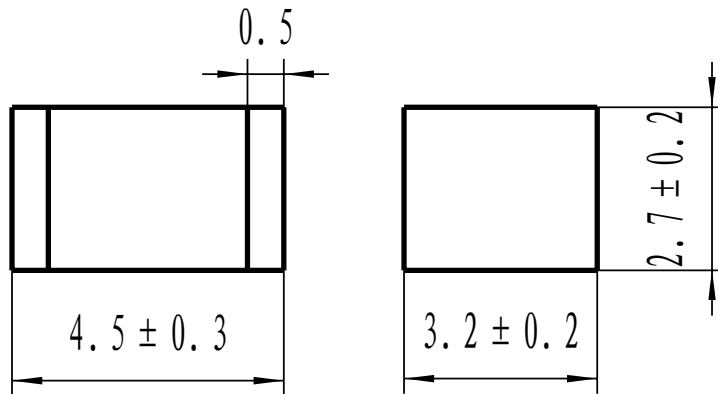

二、电性能参数/ELECTRICAL CHARACTERISTICS
(terms in accordance with ITU-T K.12)

1、标称直流击穿电压 (V_s) Nom. DC spark-over voltage	90V
2、直流击穿电压范围 ($100V/s$) Tolerance of V_s	$\pm 20\%$
3、冲击击穿电压 ($1kV/\mu s$) Impulse spark-over voltage	$\leq 600V$
4、耐脉冲冲击电流 ($8/20\mu s$) Impulse discharge current	1kA
5、标称耐工频电流 ($50Hz$) Nom. alternating discharge current	1A
6、绝缘电阻 ($DC50V$) Insulation resistance	$\geq 1G\Omega$
7、极间电容 ($1MHz$) Capacitance	$\leq 0.8pF$
8、工作贮存温度 Operation and storage temperature	$-40 \sim 90^\circ C$
9、气候类型 Climatic category (IEC 60068-1)	40/90/21
10、无放射性 Without Radioactivity	

三、包装信息 (TP1) Tape Package Information

- 1、数量 Quantity: 2500pcs/reel box
- 2、尺寸 Measurement: reel box: $\Phi 330*12.5mm$

四、证书

Certificates

ISO9001:2000



E304047 E226846

