




杭州东沃电子科技有限公司
HangZhou DongWo Electronic Technology Co., Ltd.

Specification of Gas discharge Tube

Part No. : 3R420A-TP (5×7.3)

一、外形尺寸/DIMENSION (Unit:mm, Scale: 5:1)

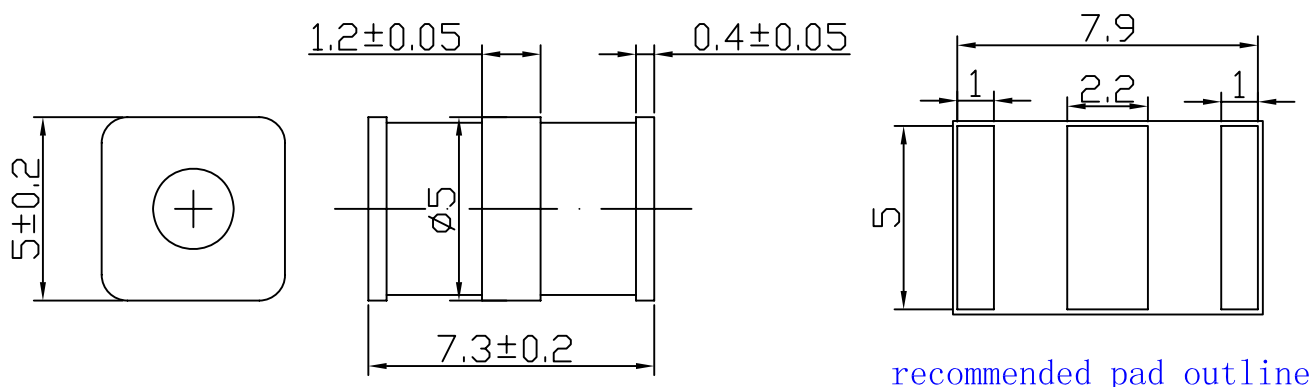

二、电性能参数/ELECTRICAL CHARACTERISTICS

(terms in accordance with ITU-T K.12)

1、标称直流击穿电压 (Vs)	
Nom. DC Spark-over voltage	420v
2、直流击穿电压范围 (100V/5)	
Tolerance of Vs	350v ~ 500v
3、冲击击穿电压(1kV/us)	
Impulse spark-over voltage	<950v
4、耐脉冲冲击电流 (8/20us)	
Impulse discharge current	5kA
5、标称耐工频电流 (50Hz)	
Nom. alternating discharge current	5A
6、绝缘电阻 (DC100V)	
Insulation resistance	>1G Ω
7、极间电容 (1MHz)	
Capacitance	<1.2pF
8、工作贮存温度	
Operation and storage temperature	-40 ~ 90℃
9、气候类型	
Climatic category (IEC 60068-1)	40/90/21
10、无放射性 Without Radioactivity	

三、包装信息 (方方) Package Information

- 1、数量Quantity: 900 pcs/reel box [900只/盘]
- 2、尺寸 Measurement: Reel box : Φ330*30 mm

四、证书 Certificates

ISO9001:2000

