




杭州东沃电子科技有限公司
HangZhou DongWo Electronic Technology Co., Ltd.
Specification of Gas discharge Tube

Part No.:2R600AI-N ($\Phi 8 \times 6$)

一、外形尺寸/DIMENSION (Unit:mm, Scale:3:1)

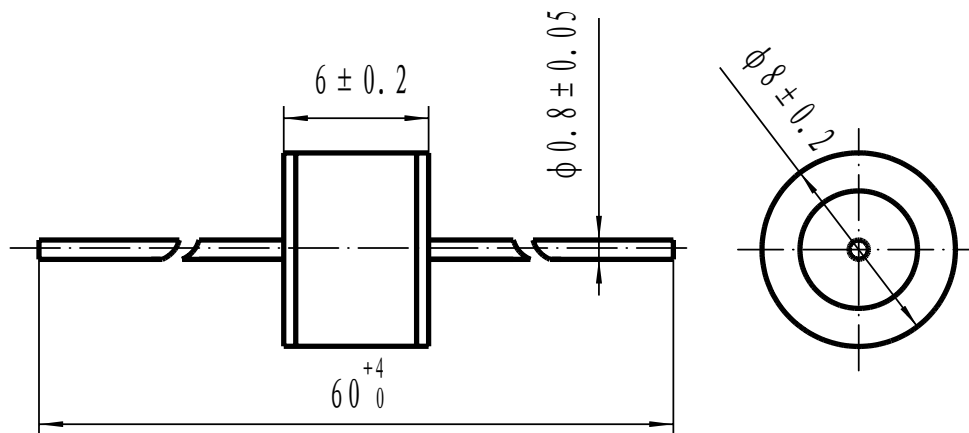

二、电性能参数/ELECTRICAL CHARACTERISTICS
(terms in accordance with ITU-T K.12)

1、标称直流击穿电压 (Vs)	
Nom. DC spark-over voltage	600V
2、直流击穿电压范围 (100V/s)	
Tolerance of Vs	$\pm 20\%$
3、冲击击穿电压 (1kV/ μs)	
Impulse spark-over voltage	$\leq 900V$
4、耐脉冲冲击电流 (8/20 μs)	
Impulse discharge current	10kA
5、标称耐工频电流 (50Hz)	10A
Nom. alternating discharge current	
6、绝缘电阻 (DC100V)	$\geq 1G\Omega$
Insulation resistance	
7、极间电容(1MHz)	$\leq 1.5pF$
Capacitance	
8、工作贮存温度	
Operation and storage temperature	$-40 \sim 90^{\circ}C$
9、气候类型	
Climatic category(IEC 60068-1)	40/90/21
10、无放射性 Without Radioactivity	

三、包装信息(2R) Package Information

- 数量 Quantity: 100pcs/plastic box, 4000pcs/carton
- 尺寸 Measurement: Plastic box: 243*166*12mm,
Carton: 345*255*200mm

四、证书

Certificates

ISO9001:2000



E304047 E226846

