




杭州东沃电子科技有限公司
HangZhou DongWo Electronic Technology Co., Ltd.
Specification of Gas discharge Tube
Part No.:3R75P ($\Phi 8 \times 10$)

一、外形尺寸/DIMENSION (Unit:mm, Scale:2:1)

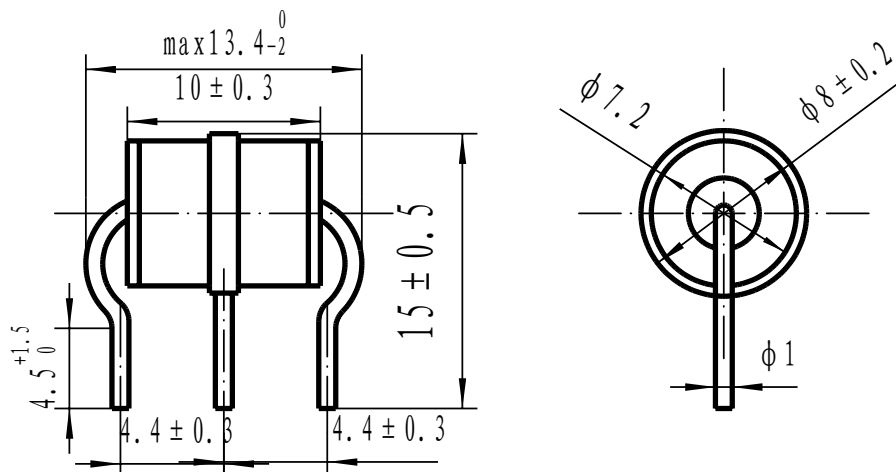

二、电性能参数/ELECTRICAL CHARACTERISTICS
(terms in accordance with ITU-T K.12)

1、标称直流击穿电压 (V_s)	
Nom. DC spark-over voltage	75V
2、直流击穿电压范围 (100V/s)	
Tolerance of V_s	$\pm 20\%$
3、冲击击穿电压 (1kV/ μs)	
Impulse spark-over voltage	$\leq 600V$
4、耐脉冲冲击电流 (8/20 μs)(a+b-e)	
Impulse discharge current	20kA
5、标称耐工频电流 (50Hz) (a+b-e)	20A
Nom. alternating discharge current	
6、绝缘电阻 (DC50V)	$\geq 1G\Omega$
Insulation resistance	
7、极间电容(1MHz)	$\leq 1.5pF$
Capacitance	
8、工作贮存温度	
Operation and storage temperature	$-40 \sim 90^\circ C$
9、气候类型	
Climatic category(IEC 60068-1)	40/90/21
10. 无放射性 Without Radioactivity	

三、包装信息(3R) Package Information

- 数量 Quantity: 100pcs/plastic box, 5000pcs/carton
- 尺寸 Measurement: Plastic box: 197*167*9mm,
Carton: 360*210*260mm

四、证书

Certificates

ISO9001:2000



E304047 E226846

