


陶瓷放电管二极管

一、外形尺寸

Ø8 x 8

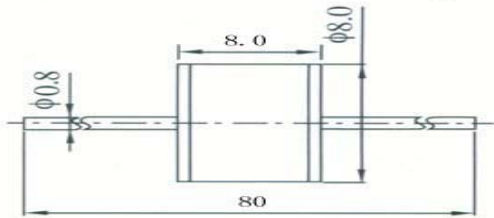

二、电性能参数

1.标称直流击穿电压	(100V/ s)	470V
2.直流击穿电压范围	(100V/ s)	±20%
3.冲击击穿电压	(100V/µs)	700V
	(1kV/µs)	800V
4.耐脉冲冲击电流	(8/20µs,10 times)	10kA
5.耐脉冲冲击电流	(10/1000µs,300 times)	100A
6.标称耐工频电流	(50Hz,1s,5 times)	10A
7.绝缘电阻	(DC100V)	≥1GΩ
8.极间电容	(1MHz)	≤1.5PF